



* Teknik veriler ve özellikler haber verilmeksizin değiştirilebilir

Pompalama Ünitesi

		HP16o6H	HP18o8ECX
Max. theoretical output	m ³ /h	160	180
Max. pressure on concrete	bar	53	83
Concrete cylinders (diam. x stroke)	mm	230 x 2100	260 x 2100
Concrete hopper capacity	l	550	600
Hydraulic circuit		open	closed

Mükemmel manevra kabiliyeti için 8x4 6000* dingil mesafeli kamyonlara monte edilmiş süper kompakt makine.

Her tür şantiyede kolay yerleştirme için içerdği stabilizasyon boyutları.

HP1808ECX pompalama ünitesi Kontrol Sistemi

Smartronic silver

Renkli entegre LCD	Diagnostic
Sayaçlar	Dokunmatik arka pano
Pompalama ünitesi yönetimi	

ASC in standard equipment




Makinenin ağırlık merkezinin otomatik sürekli doğrulaması, stabilizasyonun kısmen açılması durumunda bile, bom hareketinin maksimum güvenliğini ve çalışma alanının mümkün olan maksimum kapsamını garanti eder.



MBE
Maximum
boom extension
control



Automatic
RPM
Management

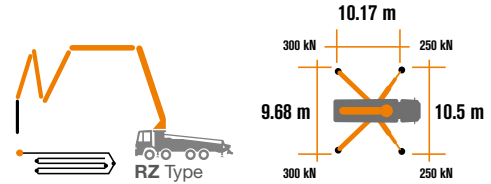

Boom Teknik Verileri

		B5RZ 48/44
Boru hattı çapı	mm	125
Maks. dikey erişim	m	47.2
Maks. yatay erişim	m	43.2
Min. açılma yüksekliği	m	9.9
Boom sayısı		5
1. boom açılma açısı		90°
2. boom açılma açısı		180°
3. boom açılma açısı		180°
4. boom açılma açısı		250°
5. boom açılma açısı		250°
Dönüş açısı		+/-270°
Uç hortum uzunluğu	m	4

Control System with pumping unit HP1606H

Easytronic Silver

Renkli entegre LCD	Pompalama ünitesi yönetimi
Sayaçlar	Diagnostic



LSC Safe boom operation is guaranteed when either two, three or four outriggers are fully opened.



Automatic
RPM
Management



Serie STEELTECH K48

Standart Ekipmanlar

Front "X" style diagonal outriggers with double telescopic opening and swing-out rear outriggers for a quick and easy set-up also in narrow areas

PTO / Araşanzıman güç aktarımı

"Load Sensing" sahip boom oransal valfleri

Kazan ızgara ve alt kapak güvenlik switchleri

Pompalama grubu için acil durum sistemi

2 Hetronic kablesuz oransal kumanda

Acil durumlar için 20m uzaktan kumanda kablosu

600 litre kapasiteli plastik su tankı

Orta basınç su pompası (50 l/min - 50 bar)

Ayaklar ve kazan da LED aydınlatmalar

VALME Çift cidarlı boru ve dirsek sistemleri

Kromkarbür kaplı flanşlar ile

Yıkama aksesuarları

Yüksek dayanımlı S tüp, gözlük ve aşınma ringi

Krom karbür kaplı kaynak dolgulu

İtalya üretim ve Avrupa Test Merkezi onaylı yüksek dayanımlı çelik konstrüksiyon tasarımı

Opsiyonlar

Smartronic Gold (Smartronic Silver + ASC Advanced Stability Control)

Smartronic Advanced: In addition to the Smartronic Gold functions, provides ASC2.0 stability control, ABC boom oscillation control (Antibouncing), automatic boom opening and closing. Includes radioremove control Hetronic or HBC with display

Easytronic Gold (Easytronic Silver + LSC Light Stability Control)

Automatic boom opening and closing

Centralized boom lubrication system

Concrete shut-off valve

High pressure water pump 28l / 120 bar

Radio remote control: Hetronic or HBC equipped with display


Straight concrete piping on double layer boom with high wear-resistance chromium carbide inserts CIFA LLT Long Life Top

Wide choice of customer personalization colours

*Over 100 options available; details available on truck pumps optional booklet

Dağıtıcı Boom


B5RZ 48/44

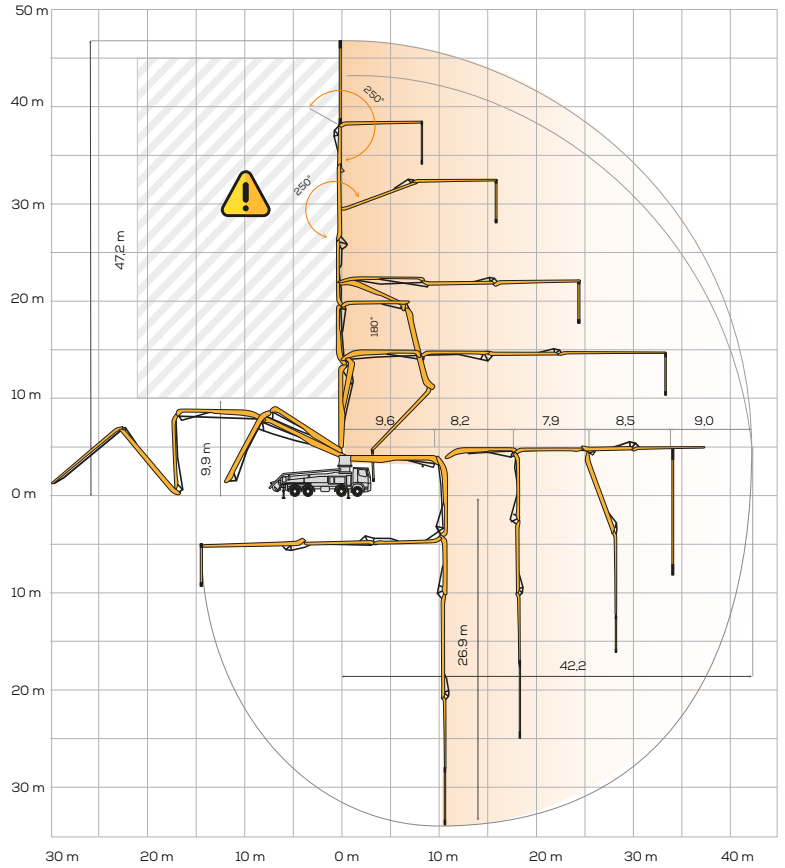

**Advanced
Stability Control
2.0**



Antibouncing



**Boom Automatic
Opening and Closing**

SmartronicVideo



MOTTO DAN. MUH. VE TEKN. LTD. STI.
Orhanlı mah. Derviş cad. No:24 GAT Plaza K:2 Tuzla, 34956, İstanbul



motto-tr.com



K48_TR_0320